


# ARiSTO


---

RETRACTABLE ROOF SYSTEM

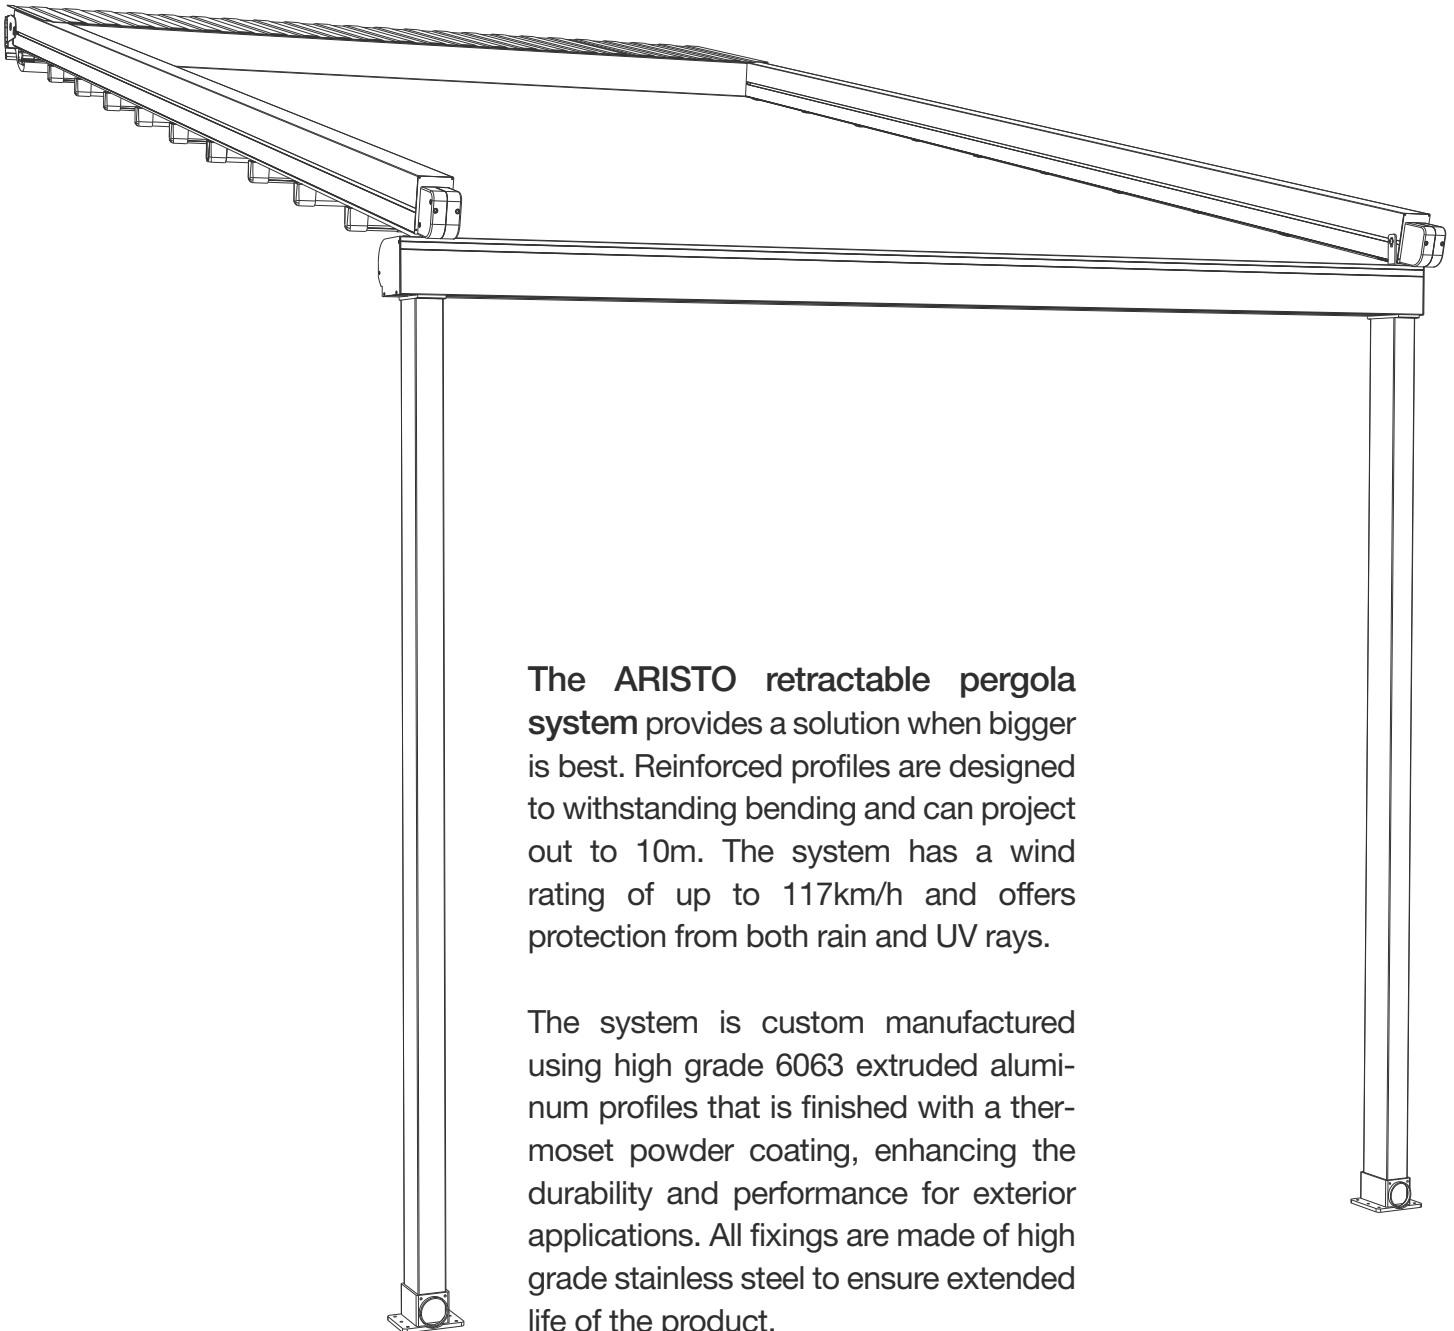

The **ARiSTO retractable pergola system** provides a solution when bigger is best. Reinforced profiles are designed to withstand bending and can project out to 10m. The system has a wind rating of up to 117km/h and offers protection from both rain and UV rays.

The system is custom manufactured using high grade 6063 extruded aluminum profiles that is finished with a thermoset powder coating, enhancing the durability and performance for exterior applications. All fixings are made of high grade stainless steel to ensure extended life of the product.

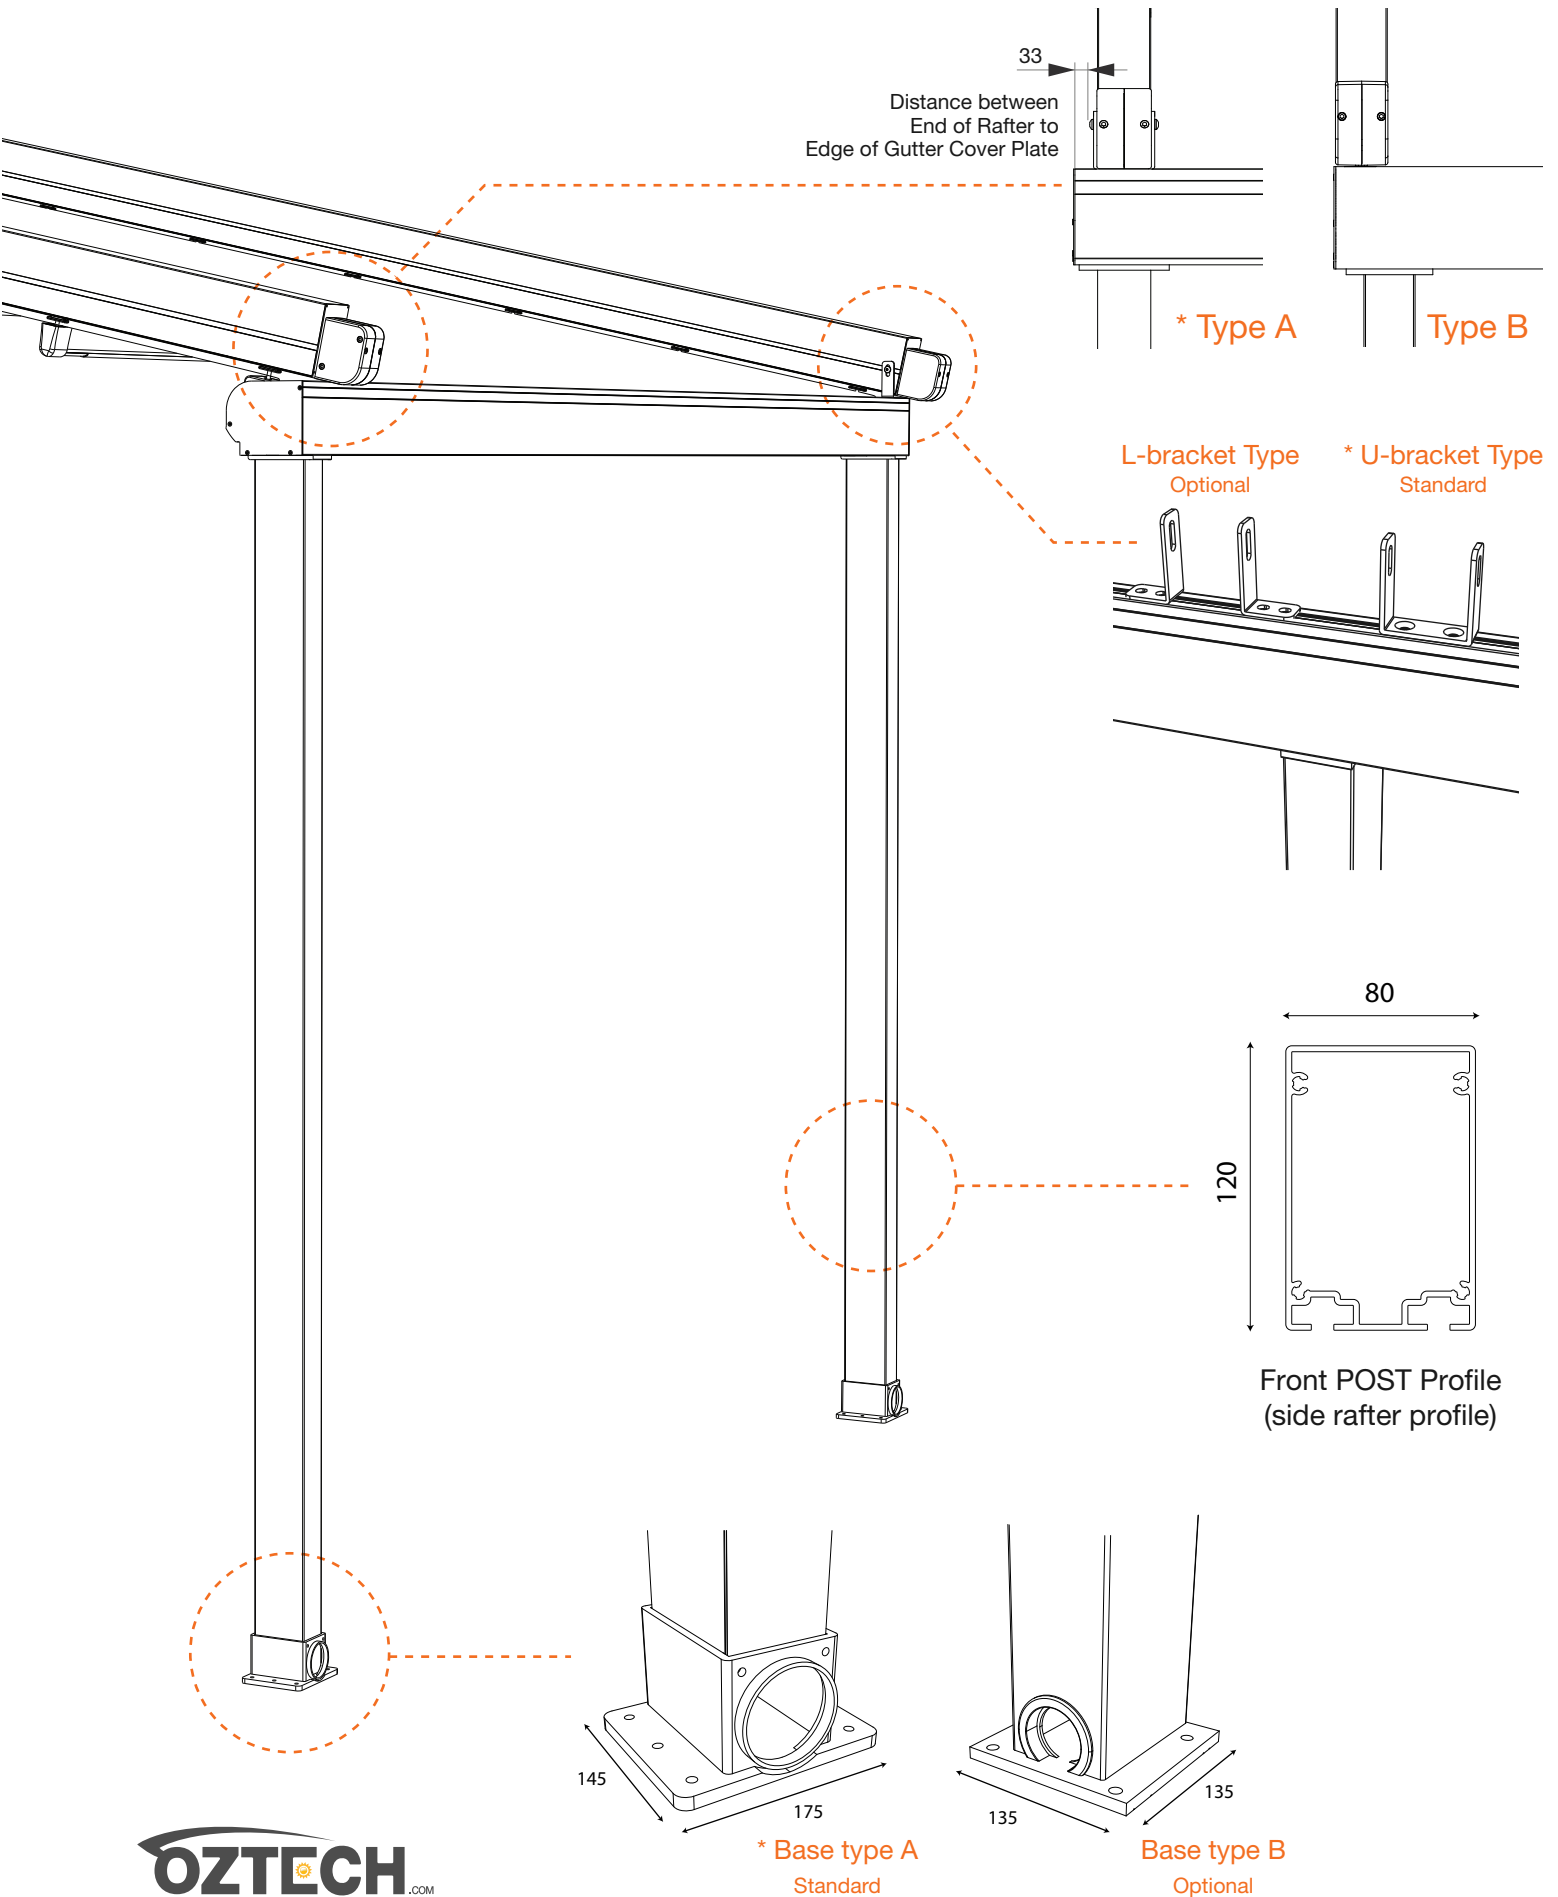


### Single Module

**Width. 2m > 5m**

Single module with  
single motor & 2 rafters

Projection. Max.10m

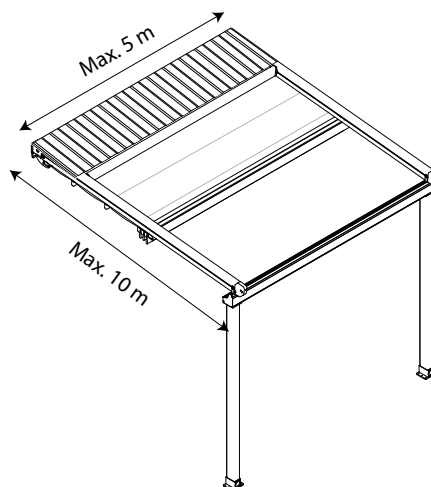


### Double Module

**Width. 5m > 9m**

Double modules with  
single motor & 3 rafters

Projection. Max.10m

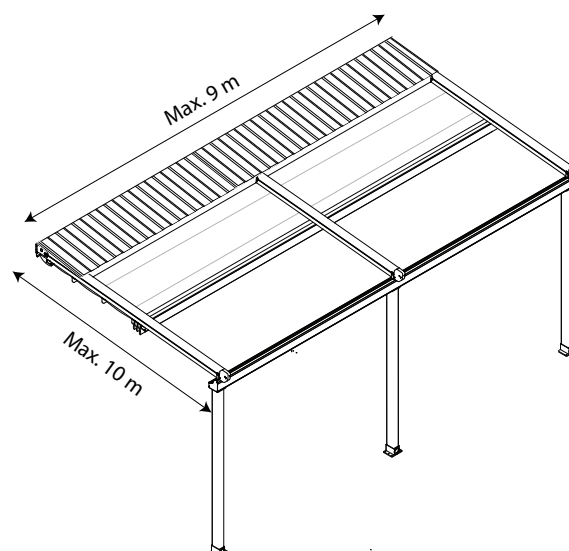



### Triple Module


**Width. 9m > 13m**

Triple modules with  
single motor & 4 rafters

Projection. Max.10m


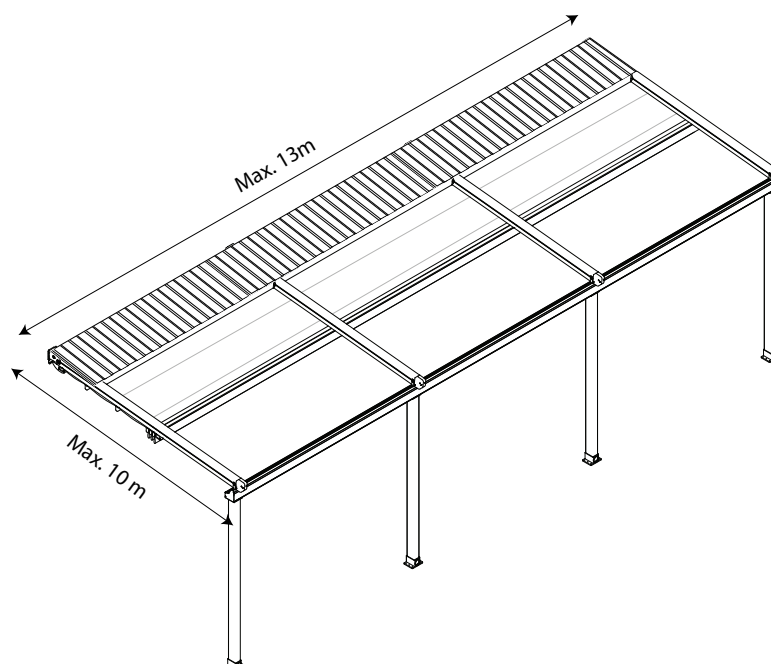


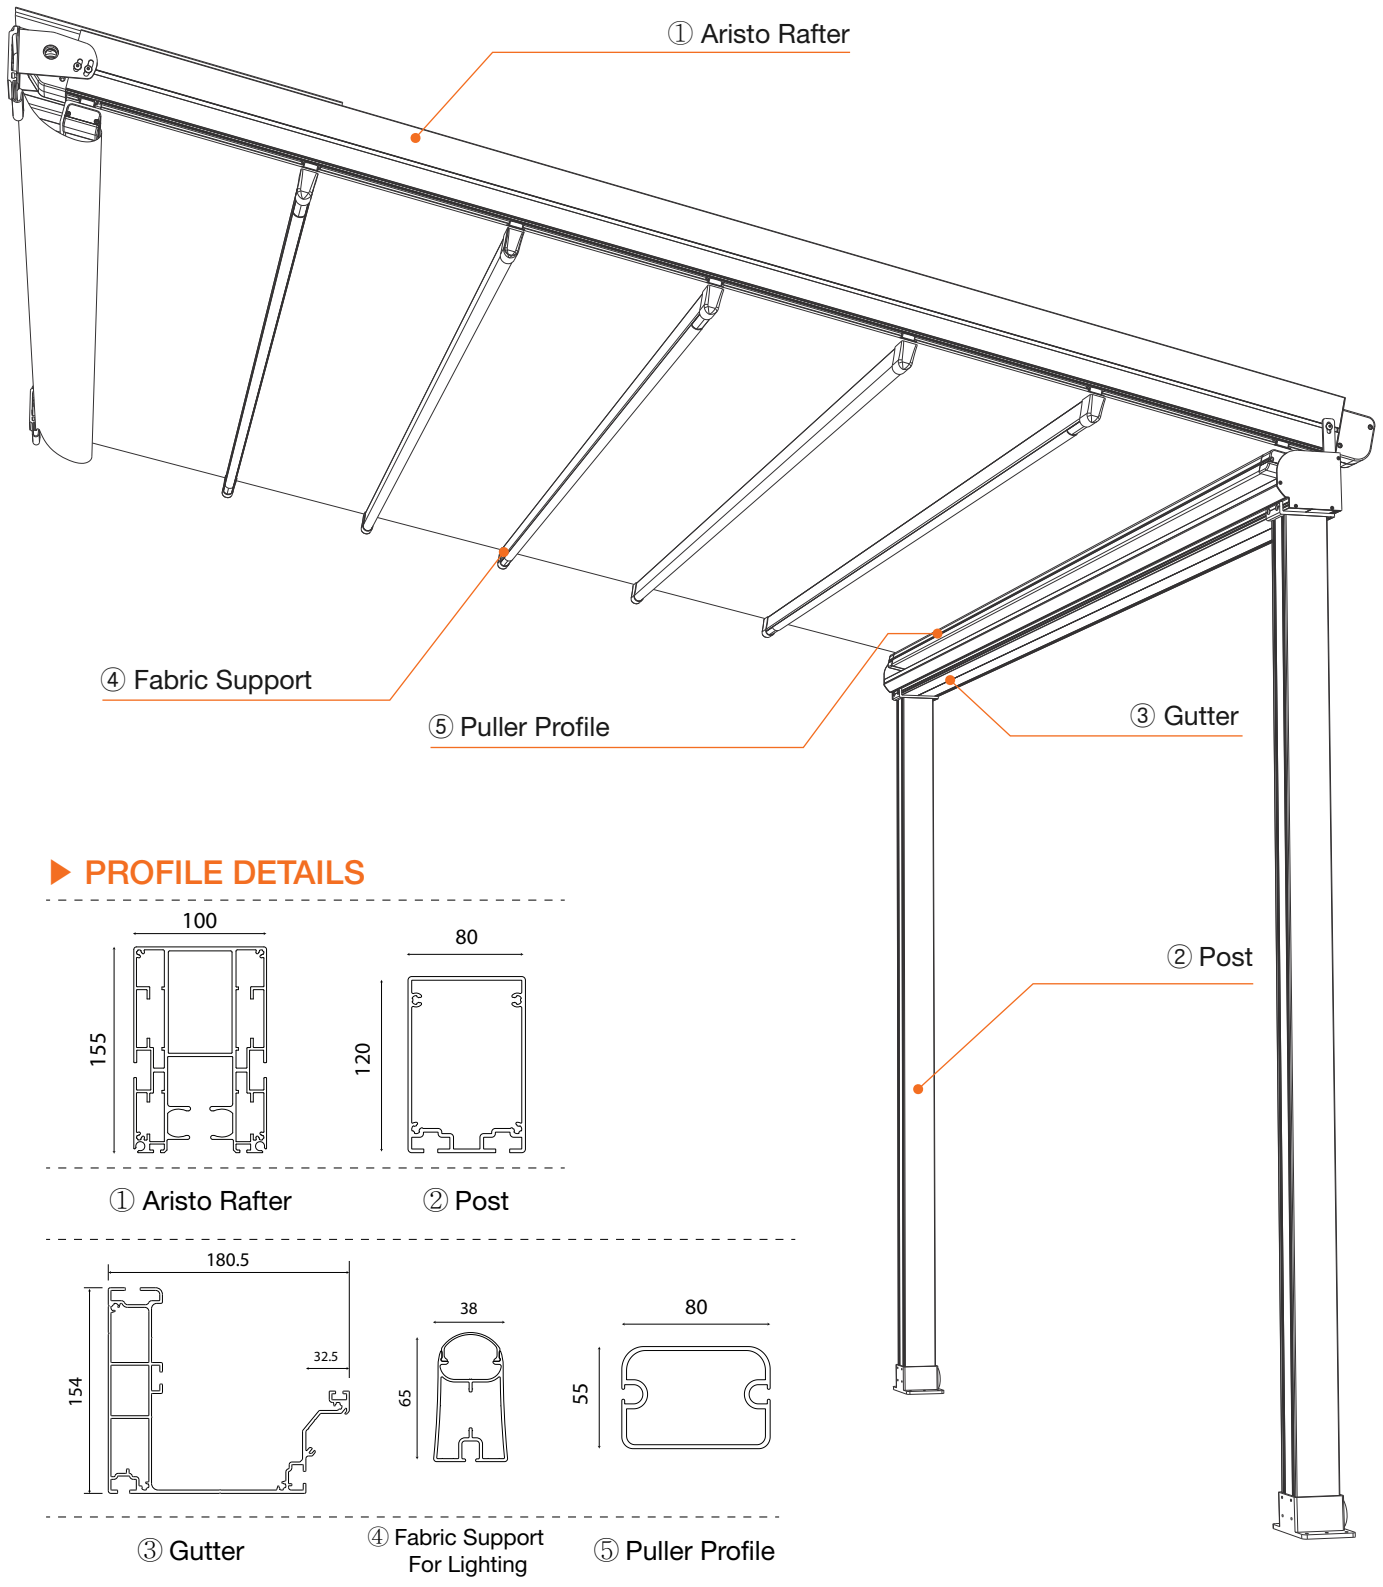

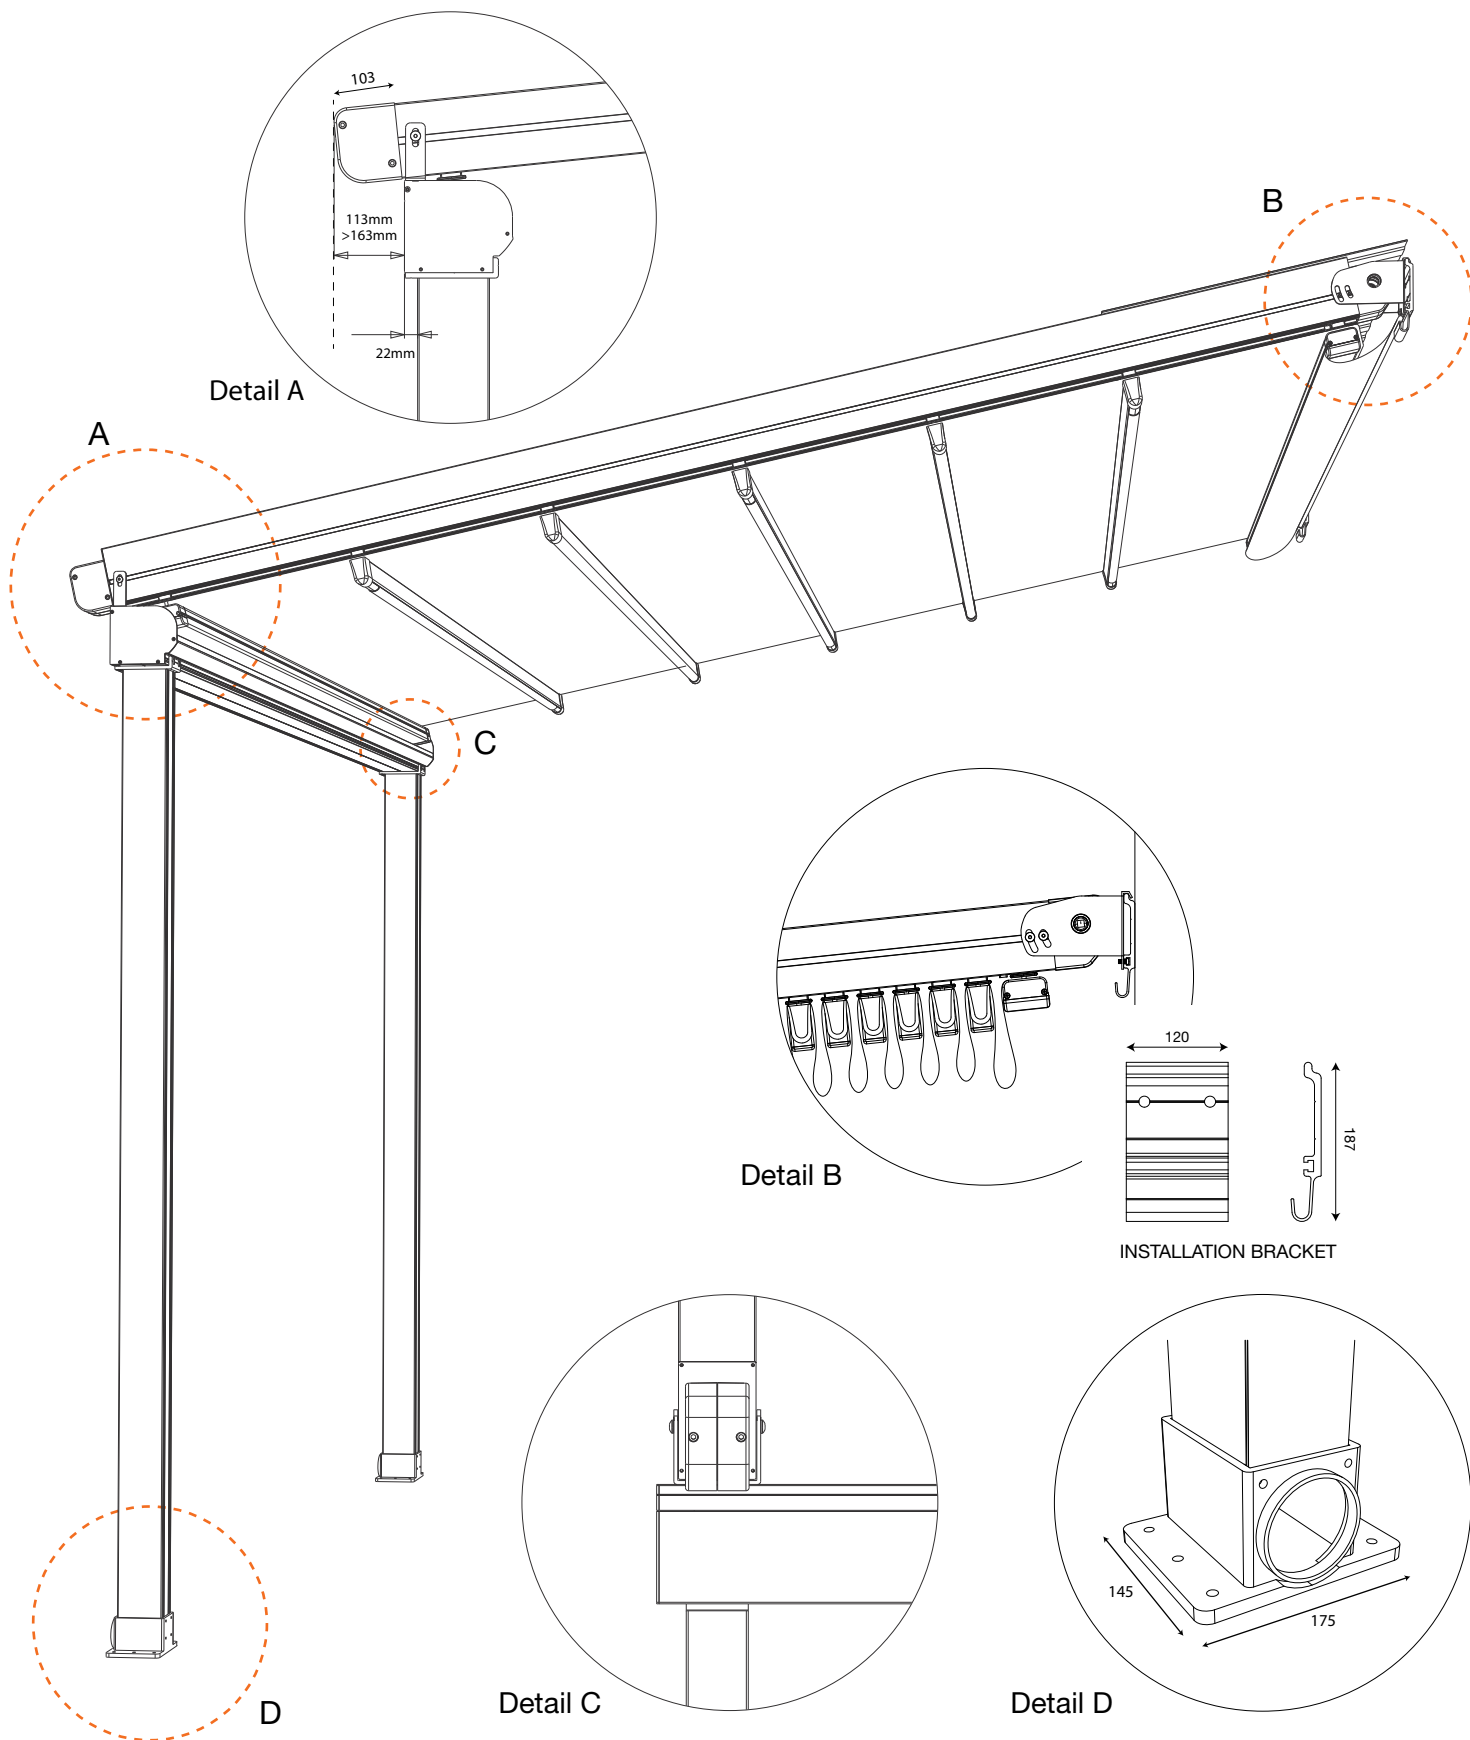



# ARiSTO

## A. Width

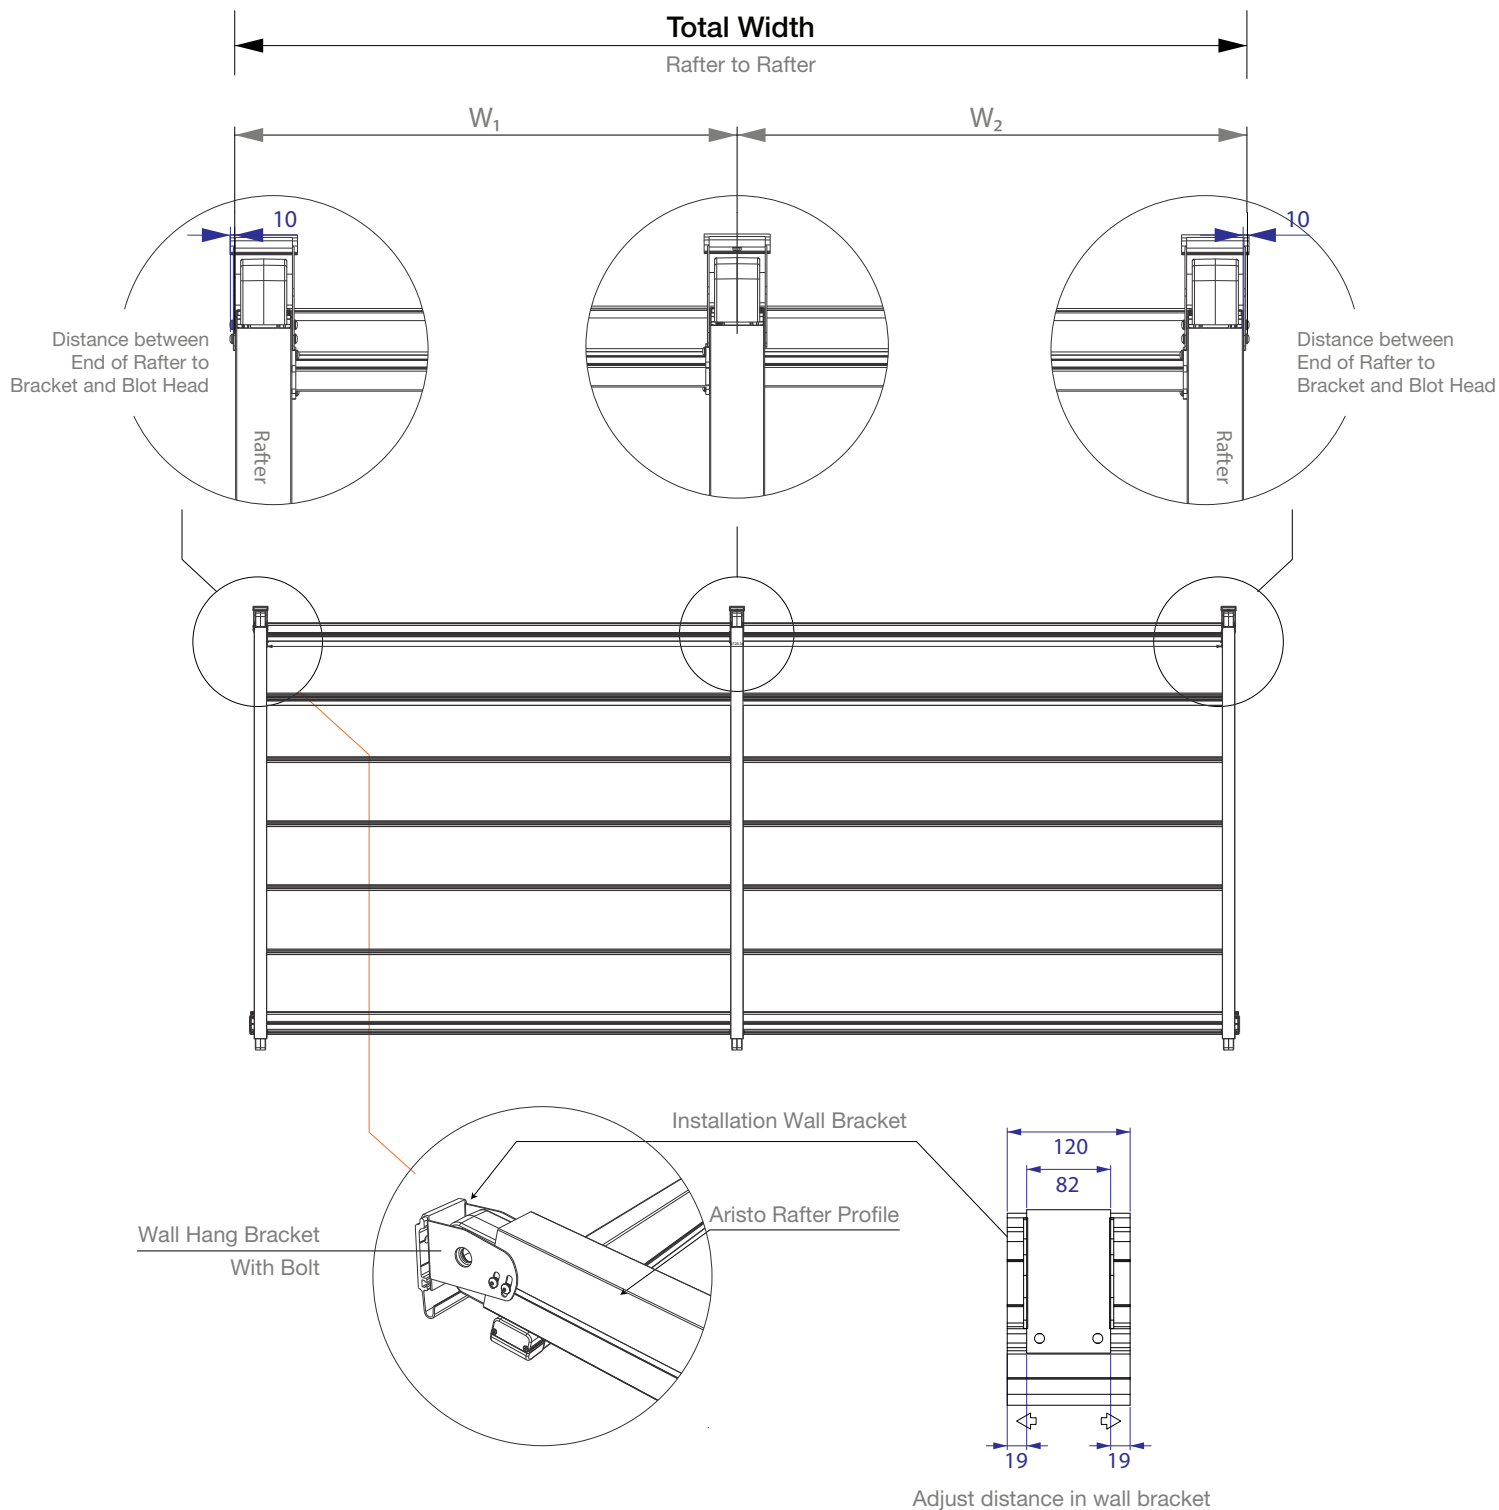
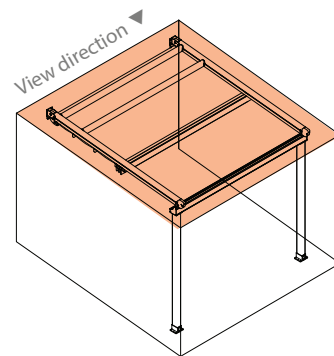


# ARiSTO

## A. Width

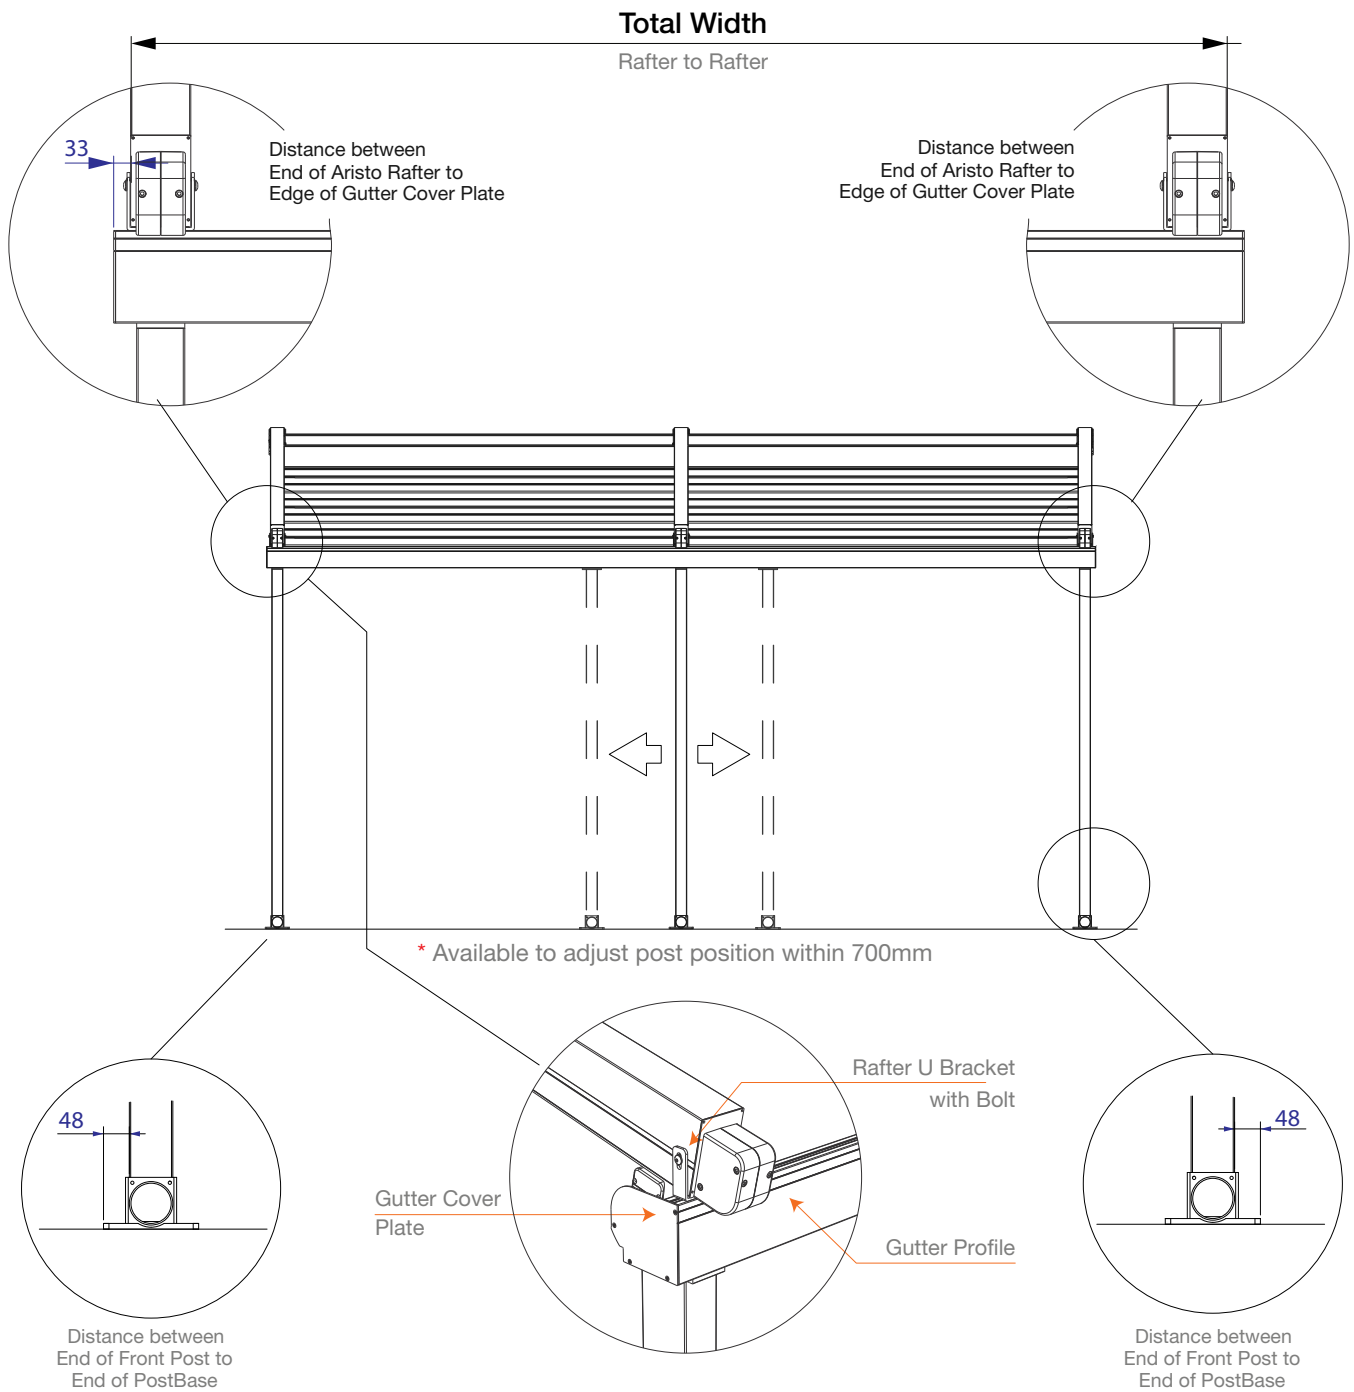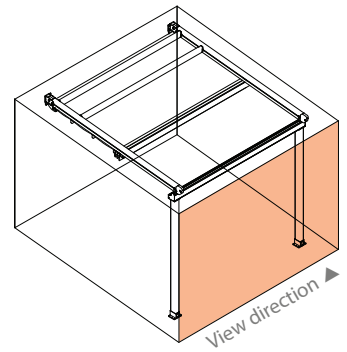

## B. Projection & Height

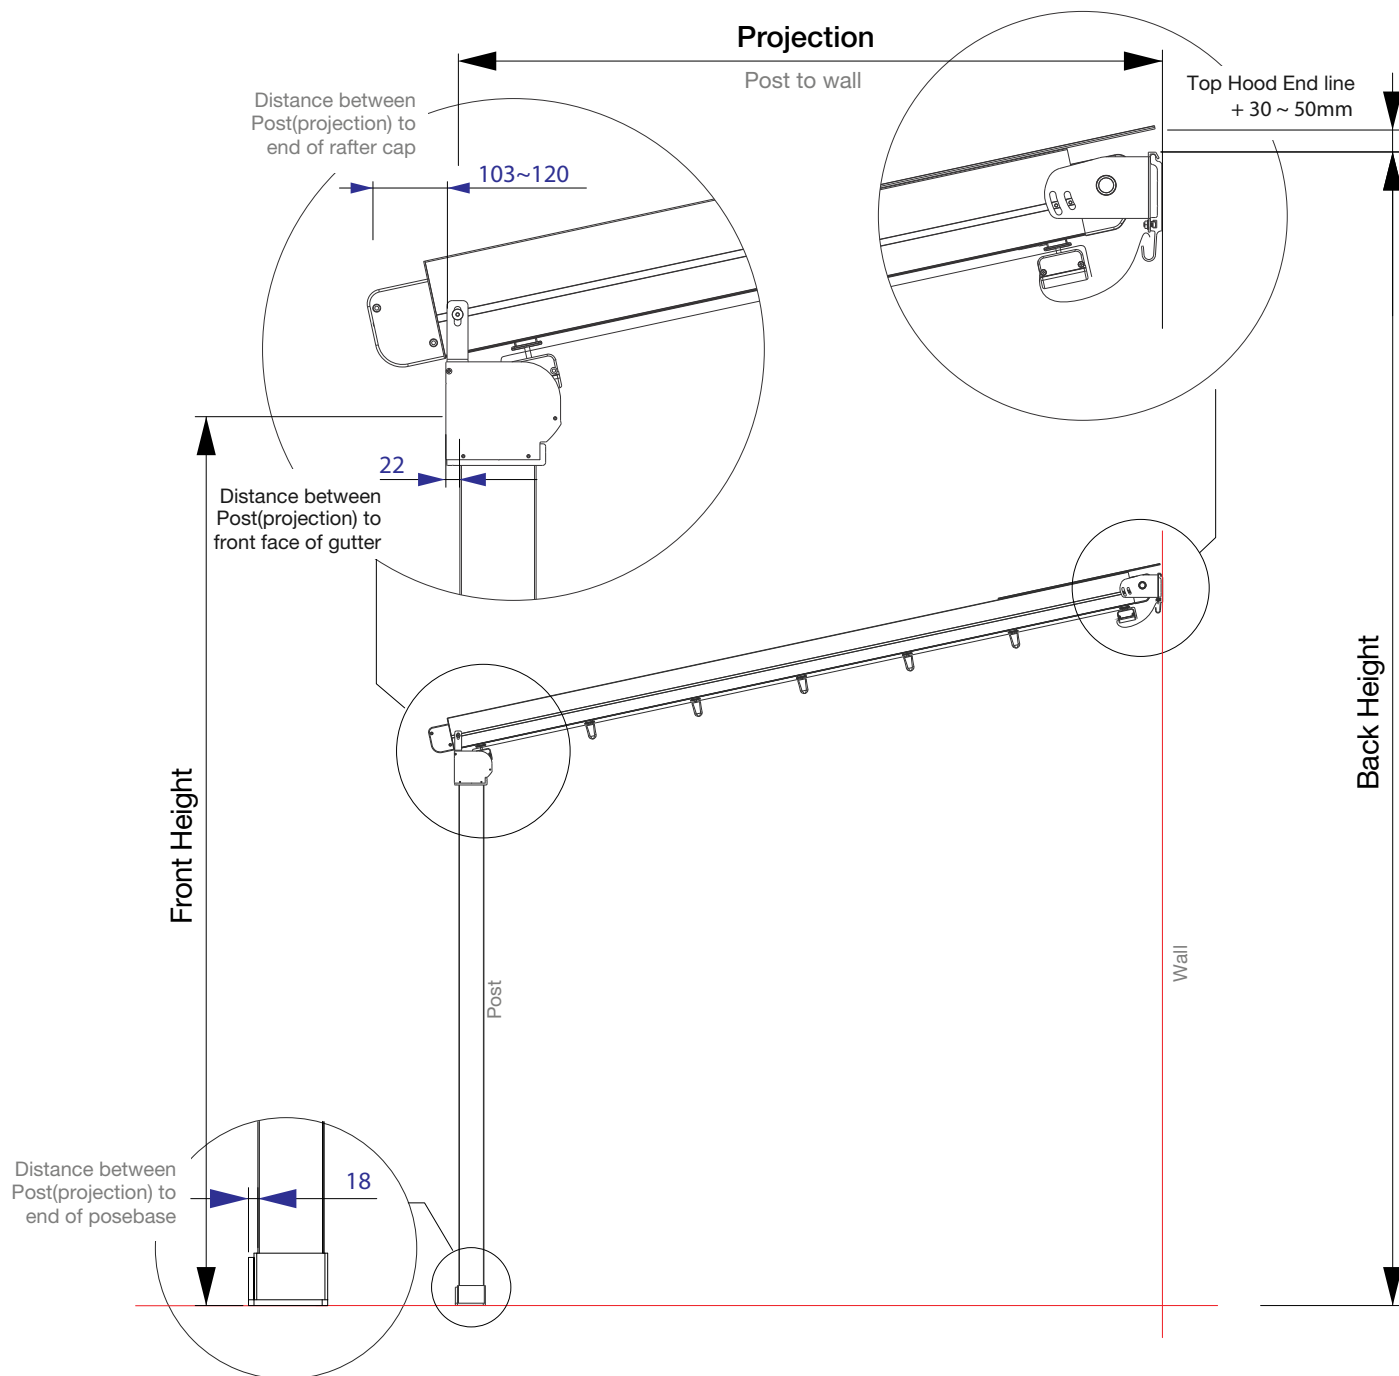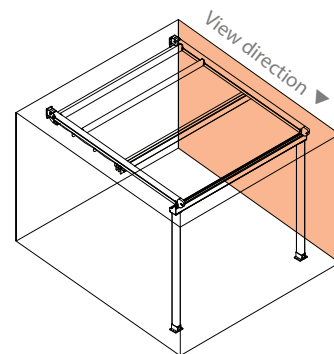

## C. Angle

		Module Width													
Projection	ARISTO	2.0 M	fall	2.5 M	fall	3.0 M	fall	3.5 M	fall	4.0 M	fall	4.5 M	fall	5.0 M	fall
	2.0 M	2.7 °	379	3.5 °	407	4.5 °	442	5.0 °	460	5.7 °	485	6.0 °	495	7.0 °	531
	3.0 M	2.7 °	426	3.5 °	468	4.5 °	521	5.0 °	547	5.7 °	584	6.0 °	600	7.0 °	653
	4.0 M	2.7 °	474	3.5 °	530	4.5 °	600	5.0 °	635	5.7 °	684	6.0 °	705	7.0 °	776
	5.0 M	3.4 °	585	4.5 °	679	5.5 °	766	6.0 °	811	6.0 °	811	6.5 °	855	7.5 °	943
	6.0 M	3.4 °	645	4.5 °	757	5.5 °	863	6.0 °	916	6.0 °	916	7.5 °	1075	8.5 °	1182
	7.0 M	3.4 °	705	4.5 °	836	5.5 °	959	6.0 °	1021	7.0 °	1144	7.5 °	1207	8.5 °	1331
	8.0 M	4.5 °	915	5.5 °	1055	6.5 °	1196	7.0 °	1267	7.0 °	1267	9.0 °	1552	10.0 °	1696
	9.0 M	4.5 °	993	5.5 °	1152	6.5 °	1310	7.0 °	1390	8.0 °	1550	9.0 °	1710	10.0 °	1872
	10.0 M	4.5 °	1072	5.5 °	1248	6.5 °	1421	7.0 °	1513	8.0 °	1690	9.0 °	1869	10.0 °	2048

If lesser pitch than above table is required, please contact our staff for more details.


## D. Option

### 1. Type




a. Freestanding

### 2. Rafter Bracket



a. Rafter U bracket

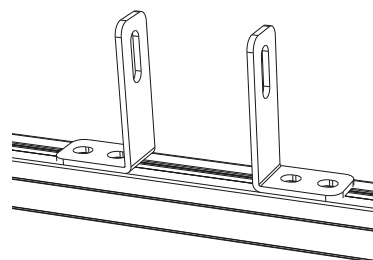

b. Rafter L bracket

## D. Option

### 3. LED Lighting system




a. UNI LED

- LED Length - 265mm
- Quantity - 2 per module(available 3 per module)
- Layout - 1, 3, 5, 7, 9, 11, 13, 15, 17, 19 middle line
- ※ Please contact us if you want to customize LED layout



b. MAXI LED

- LED Length - 600 ~ 5,400mm
- Quantity - 1 per module
- Layout - 1, 4, 7, 10, 13, 16, 19, 22 middle line
- ※ Please contact us if you want to customize LED layout

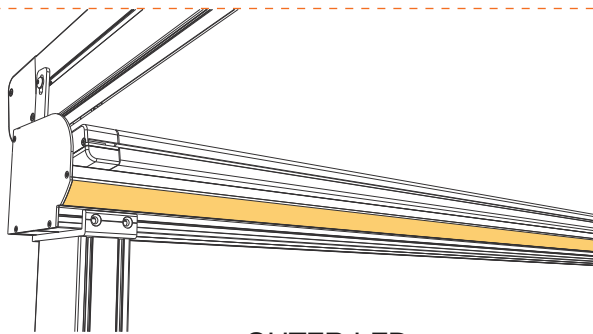

c. GUTER LED

- LED Length = Gutter Length
- Quantity - 1 line(Harbour - 2)

#### ★ Please choose one lighting system

- |                  |                        |
|------------------|------------------------|
| 1) UNILED ONLY   | 3) UNILED + GUTTER LED |
| 2) MAXI LED ONLY | 4) MAXI + GUTTER LED   |

♣ LED color - natural(4000~4500k)

♣ Available dimming function